



TELIKOU

PRODUCTS

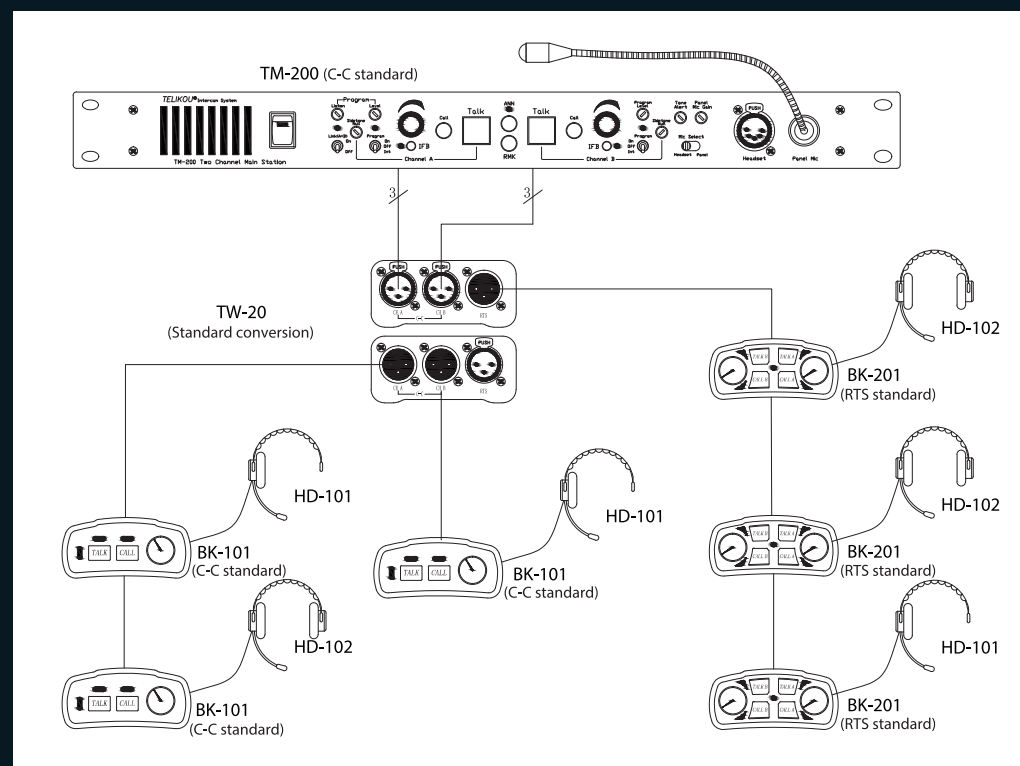

■ TW-20: The Conversion between Clear-Com and RTS Standard

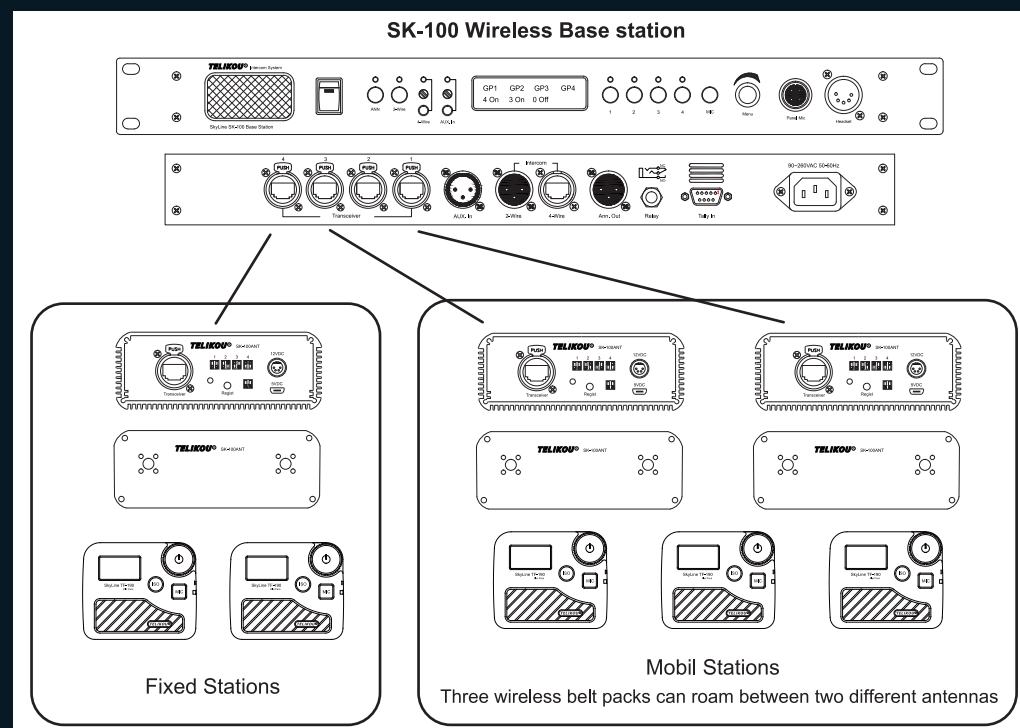

■ Application of SK-100 multi antennas



TELIKOU Technologies Co., Ltd

Address: Room 101 Building 13 No.14 Jiaomenjia Fengtai Beijing China 100068

Website: www.telikou.com E-mail: info@telikou.com

Phone: 0086-10-67569774

TELIKOU®

CONTENT

- 1. Wireless Intercom**
- 2. Wireless IFB**
- 3. Wireless Interface**
- 4. IP Intercom System**
- 5. Two-Wire / Party Line Intercom**
- 6. Conversion Interface**
- 7. RTS Compatible**
- 8. IFB System**
- 9. Four Wire Intercom**
- 10. Power Supply**
- 11. Headset and Gooseneck Microphone**
- 12. Tally System**
- 13. Power sequential controller / Audio Products**
- 14. Teleprompter**

Content

WIRELESS INTERCOM

SK Series

■ SK-100ANT Antenna

- Supports 4x SK-190 Belt Pack
- Belt Pack Roaming
- Supports External Power Supply



■ SK-190 Wireless Belt Pack

- Uses 4 x AA Battery
- ISO Function
- Supports 3.5mm Earphone or Tally
- Micro-USB Charging Port




■ SK-100 Wireless Base Station

- Four Antenna Port
- PGM in, ANN out, Relay and Tally
- 2-Wire / 4-Wire Connector
- Panel Speaker and Gooseneck Microphone



SK-200 Wireless Intercom

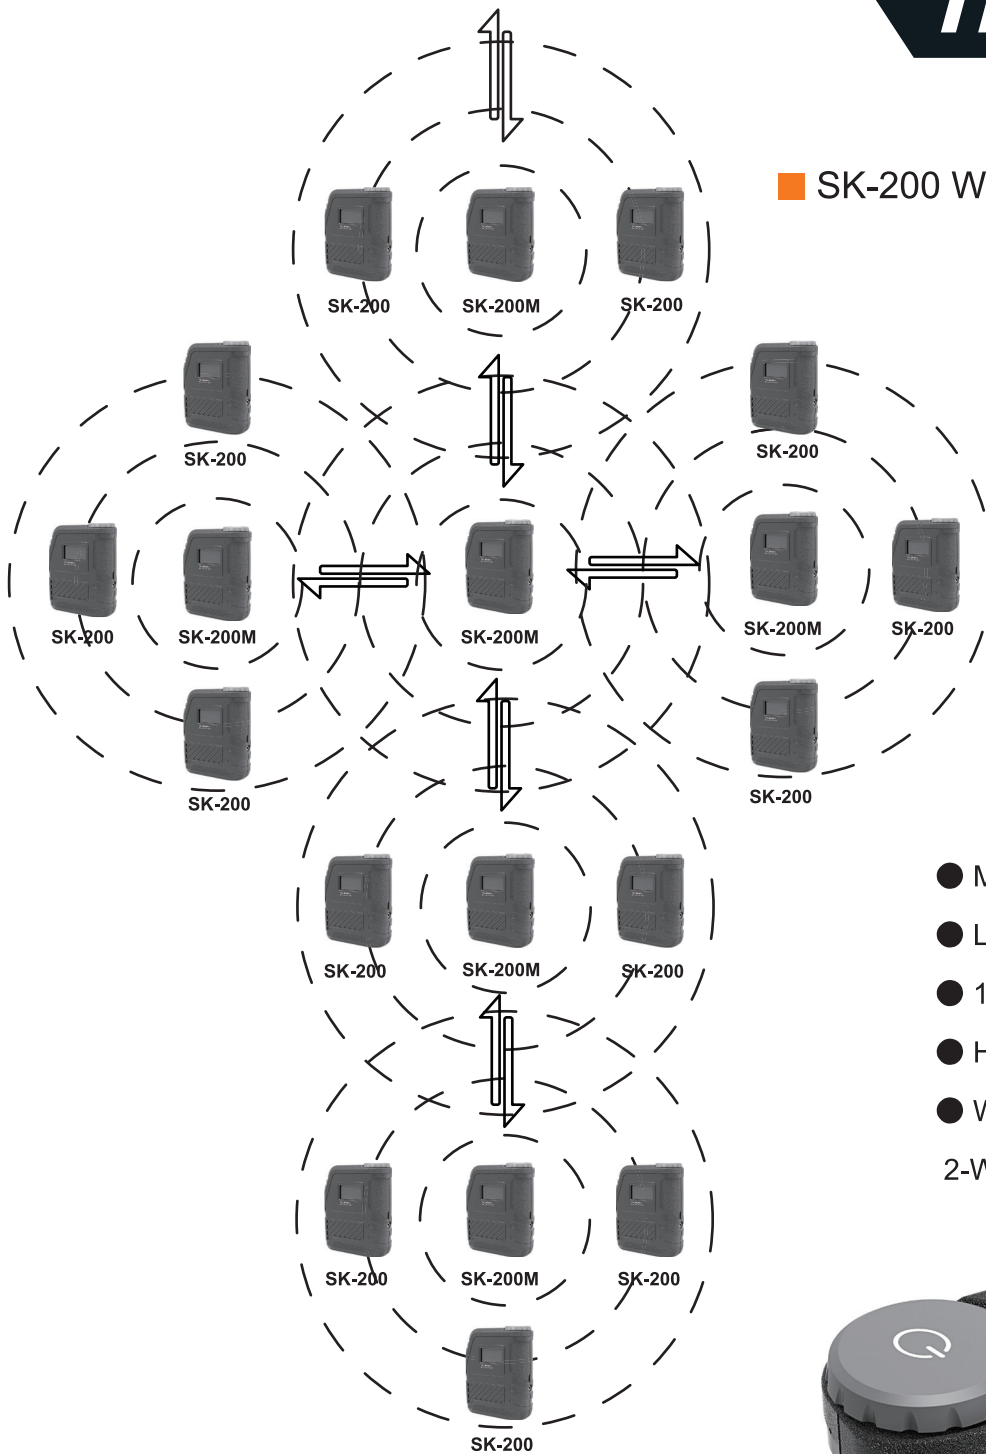

- Mini size
- LCD screen
- 1.8G/1.9G Frequency
- Headwear accessories
- Wireless Interface with
2-Wire / 4-Wire Connector



■ MC-380 / BK-380 Maintenance Wireless Intercom System

- Up to Sixteen Full duplex users
- 150~960MHz Optional
- Aviation Headset Connector
- Encrypted communication
- Wireless relay function
- Unlimited Listener
- Water Proof for Belt Pack
- Type-C Charging Port
- 1~3KM Range



WIRELESS IFB

■ Wireless IFB : IFB-316

- VHF: 160~270MHz,
UHF: 868 / 500~980MHz
- Unlimited users
- HQ Audio
- 3.5mm Earphone Connector



Wireless Interface

TF-1900 Wireless Interface

- Bring Wireless into Wired System
- 2-Wire / 4-Wire Interface
- Supports 4x SK-190 Belt Pack
- Belt Pack Roaming



MDS-100 Economic Wireless

- 2-Wire / 4-Wire Connectors
- 433MHz Frequency
- Carry Up to Four BK-1200 wireless Belt Packs

WTI-200 Walkie Talkie Interface

- Brings Walkie Talkie into Intercom System
- Full Duplex
- 2-Wire / 4-Wire Intercom Connectors



IP Intercom System

TELIKOU®

■ IPX-600 Six Channels IP Main Station



- Six Channels IP Main Station
- Supports PP and PL Talking Mode
- Supports Tally Function
- Supports Dante
- LCD Screen
- Network Connector
- Multi Stations Link Function



■ IPX-100 IP Desktop / Built-In Station

- Supports PoE Power
- PP and PMP Model
- Supports Call or Tally when PP Model
- Supports Dante

■ IP-1X IP Interface

- Turns Traditional Intercom System into IP
- 2-Wire and 4-Wire Connector
- Supports Dante



■ BK-301 IP Belt Pack

- XLR-3 Power Connector
- RJ-45 PoE Network Connector
- Supports Call or Tally when PP Model
- Supports Dante

TWO-WIRE / PARTY LINE INTERCOM

■ TM-800 Eight Channel Main Station



- Eight Channels Station
- P2P and P2M Talking Model
- RMK Button
- Announcement Output
- Program Input
- IFB Function

■ TM-200 Two Channel Main Station

- Two Channels Station
- RMK Button
- Program Input
- Announcement Output
- Auto Feedback Reduction Circuit
- IFB Function



■ BK-101 Belt Pack

- Single Channel Belt Pack
- PTT and Latch Microphone Button
- XLR-3 Loop Through Connectors



■ BK-102 Belt Pack

- Dual Channel Belt Pack
- PTT and Latch Microphone Button
- Separate Channel A and B Control

■ DT-100 Desktop Station

- 3.5mm Headset Jack, Sidetone Trimmer
- Wall Mounting Holes
- Mic Gain



■ WS-200 User Station

- Wall Mount or Table Sits Structure
- Internal Loudspeaker
- CHA or CHB Inputs Selectable

■ UTS-200 Speaker Station

- 2RU Box Speaker Station
- CH A or CH B Selector
- RMK Button
- Sidetone Adjustment
- Four Intercom Line with Internal Distribution



■ BK-501 Belt Pack

- Single Channel Belt Pack
- PTT Microphone Button
- XLR-3 Loop through Connectors
- Metal Case

TF-204 Four Wire Interface



- 2-Wire / 4-Wire Interface
- Two Channels or Four Channels Optional

TW-20 Standard Convertor

- Clear-Com to RTS Convertor



RTS COMPATIBLE

BK-201 / BK-202 Compatible with RTS Standard

- Dual Channel Belt Pack
- Compatible with RTS
- Separate Talk and Call
- XLR-3 Loop Through Intercom Cable Connectors



BT-01 Talent Belt Pack

- 2-Wire IFB Talent Receiver
- 3.5mm Earphone Jack



IFB SYSTEM

■ IFB-04M 4 Channels IFB Master Control with Power Supply

- Gooseneck Microphone Connector
- Provides Individual Access to 4 Talent Channels
- Internal Power Supply, Input: 90~260VAC Output: 24VDC / 1A



■ IFB-08M 8 Channels IFB Master Control with Power Supply

- Gooseneck Microphone Connector
- Provides Individual Access to 8 Talent Channels
- Internal Power Supply, Input: 90~260VAC Output: 24VDC / 1A



■ PTM-404 IFB Router

- 4 XLR-3M Party Line Talent Channels Output
- 4 XLR-3F Program Audio Channels Input



■ MX-2304 Distribute Matrix Panel



- Six Channel 4-wire Distribute Matrix Panel
- Supports Up to 7 Sets of MX-2304 Matrix System
- LCD Monitor displays the channel label and status

■ FT-800 Eight Channel Main Station with Tally



- Eight 4-Wire Channels with Tally (or CCU Board)
- D-Sub Tally Signal Input



■ BK-104 4-Wire Belt pack

- Talk Button and Volume Control
- RJ-45 / XLR-7 Connector
- Tally Light Connector

■ BK-100 4-Wire Belt Pack

- Volume Control
- 3.5mm Headset Jack
- RJ-45 Cabel Connector





■ WS-4A 4-Wire User Station

- Wall Mount or Desktop case
- CHA or CHB Selectable
- Aux In

Power Supply

■ PWS-20 Two Channel Power Supply



- Monitor Connector
- PGM Input and Adjustment
- Clear-Com & RTS Mode Switch
- Input: 90~260VAC / 50~60Hz

■ PWS-12 / PWS-24 Power Supply



- PWS-12: 12VDC / 1A Output
- PWS-24: 24VDC / 0.5A Output
- Input: 90~260VAC / 50~60Hz



■ TX Series XLR Hub



TX-Box:

Six XLR Hub
Female or Male Optional

TX-45:

Dual 2-In 1-Out RJ-45 Hub



HEADSET, GOOSENECK MICROPHONE

■ HD-101

Single Ear Headset



■ HD-102

Dual Ear Headset



■ HD-201

Electronic Noise Cancellation



■ HD-202

Electronic Noise Cancellation



■ **NE-10**

Neckless Headset



■ **NE-11**

Light Headset



■ **EP-23**

In Ear Headphone



■ **EP-33**

In Ear Headphone



■ **GES-18**



18" Light Electret Gooseneck
with 1/4inch Screw Connector

■ **GEM-18**



18" Electret Gooseneck
with Screw 4-Pin Aviation Connector

■ **GEH-18**



18" Super directivity Electret Gooseneck
with 1/4inch Screw Connector


■ **GDM-10/18**



10" or 18" Dynamic Gooseneck
with XLR-3M Connector

TY-12 Twelve Channels Tally Driver

- Manul: ATT, Go, Clear & All Go
- Auto: D-Sub Tally Inputs
- Dual Color Tally Light Connectors

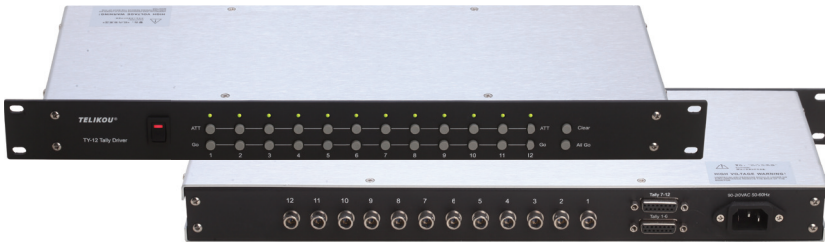

TL-2 Tally Light

- Ø8 & Ø3 Dual Color LED Light



TX-10 Ten Channel Wireless Tally

- Dual Color Tally
- DB25 Tally Input Connector
- Big Size LED Light



POWER SEQUENTIAL CONTROLLER / AUDIO PRODUCTS

■ PD-08 / PD-10 Power Distributor

- Time Delay: 0.2-1s optional
- 8 or 10 Power Connector
- Total up to 15A Current
- 90V to 260VAC Input



■ MIX-8 Audio Mixer (1RU Rack Audio Swithcer)

- 3 Balanced (6 Unbalanced) Microphone Inputs
- 2 Unbalanced Line Audio Inputs
- Independent gain adjustment
- Controllable 48V phantom power
- 2 Balanced Audio Outputs



■ AM-200 Two Channel Audio Monitor

- Headphone & External Speaker Jack
- 2 x 4 Channels Balanced Audio Inputs
- LED VU Table
- 2x10W Outputs



TELEPROMPTER



■ Lecture Teleprompter



■ Fold-able Studio Teleprompter

- 17inch / 20inch /22inch
- Reverse Scan Monitor Optional, Supports PPT
- HDMI / VGA /BNC Input
- Wireless Hand Control, Foot Control Optional
- Various Cameras are supported



■ TC-PAD Teleprompter






TELIKOU®



PoE Switch

Supports Internet Call

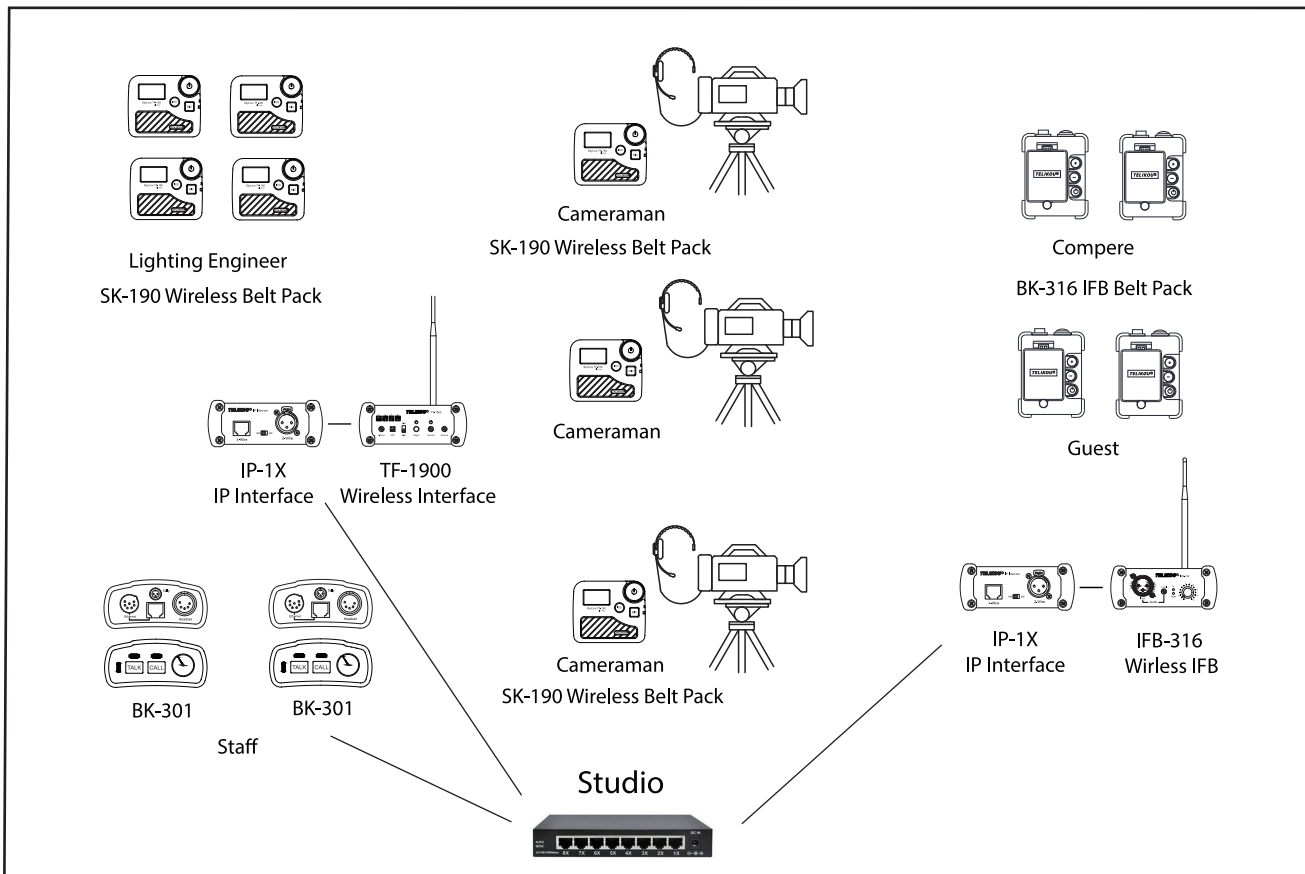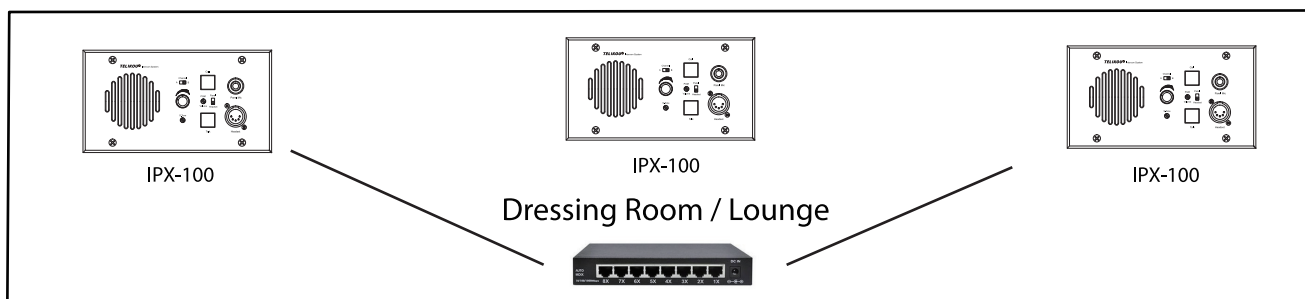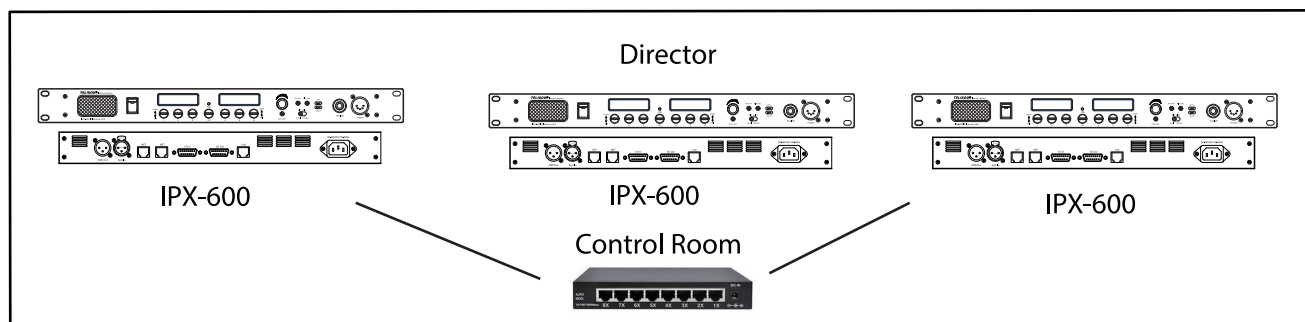

Schematic diagram of multi studio connection in IP system